

ZEROWASTE

ZeroWaste reverse osmosis water filtration system



ZRO-4 ZEROWASTE RO SYSTEM

FEATURES

Four stage system of Filtration

Stage 1: Sediment Filter removes particulates down to 5 Micron.

Stage 2: Carbon Block Filter removes chlorine taste and odors.

Stage 3: Advanced TFC Membrane rejects impurities down to 1/10,000th of a micron.

Stage 4: Activated Carbon Final Filter serves as a final polish to remove any trace residuals.

- Re-use of rinsewater (no waste)
- 24 gallon per day TFC membrane
- Adapt-A-Valve for easy installation
- Convenient long reach faucet
- 3- Gallon Storage Tank



System tested and certified by NSF International against NSF/ANSI Standard 58.

Refer to PDS for Specific Performance in the PDS for Speci

Refer to PDS for Specific Performance claims.

Once again Watts revolutionizes the water filtration industry. The all new patented ZEROWASTE Point-of-Use Reverse Osmosis System is the first ever that wastes no water. Comparable systems typically waste up to 4-12 gallons for every gallon produced. This highly efficient system provides bottled water quality for any residential or commercial application.

VERSATILITY

- No faucet air gap or drain connection required.
- Space saving design, installs under sink or in limited space.
- Adapt-A-Valve easily connects to water source.
- Ideal for low pressure or well applications.


RELIABILITY

- Advanced design uses patented technology and high quality components to assure years of continuous operation with trouble free performance.
- As with all of the products in the Watts family, the ZEROWASTE is backed by Watts 130 year reputation of excellence.

ECONOMICAL & ENVIRONMENTALLY FRIENDLY

- 100% Efficient No Wasted Water.
- Saves as much as 7,000 gallons per year in a typical residential application.
- Delivers high quality drinking water for pennies a day.

ZEROWASTE REVERSE OSMOSIS WATER FILTRATION SYSTEM TYPICAL UNDER SINK APPLICATION

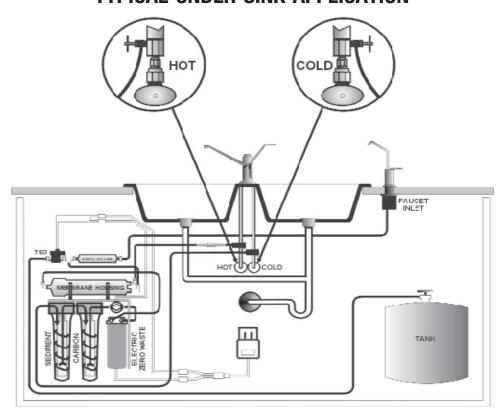

PERFORMANCE DATA

| NSF Certified for: | % Reduction | NSF Certified for: | % Reduction |
|-----------------------|-------------|-----------------------|-------------|
| Arsenic (Pentavalent) | 98.4% | Barium | 98.7% |
| Cadmium | 99.7% | Chromium (Hexavalent) | 98.0% |
| Chromium (Trivalent) | 99.0% | Copper | 98.7% |
| Cysts | 99.99% | Cryptosporidium | 99.99% |
| Entamoeba | 99.99% | Fluoride | 95.9% |
| Giardia | 99.99% | Lead | 97.3% |
| Perchlorate | 96.5% | Radium 226/228 | 80.0% |
| Selenium | 99.0% | TDS | 96.8% |
| Turbidity | 99.8% | Toxoplasma | 99.99% |

IAMPO CERTIFIED / NSF CERTIFIED

For more information please call your authorized Watts representative



1725 W. Williams Dr. C-20

Phoenix, AZ 85027 www.watts.com Phone: (888) 774-7405 Fax: (602) 588-0356